


K-FLO PUMP

High performance with silent operation

- ➔ **Twist-Lock cover**, rapid access (no tools required)
- ➔ **Impeller and diffuser made of Noryl®**, very hard-wearing and corrosion-resistant, high dimensional stability
- ➔ **Suitable for use in salt water**, corrosion proof seal assembly
- ➔ Unions included
- ➔ Available in **variable-speed** to adapt the speed according to the needs
- ➔ Recommended for pools **up to 150 m³**




See-through Twist-Lock strainer cover




Double drain with easy opening (no tools required)



Unions kit included (50/63 mm)

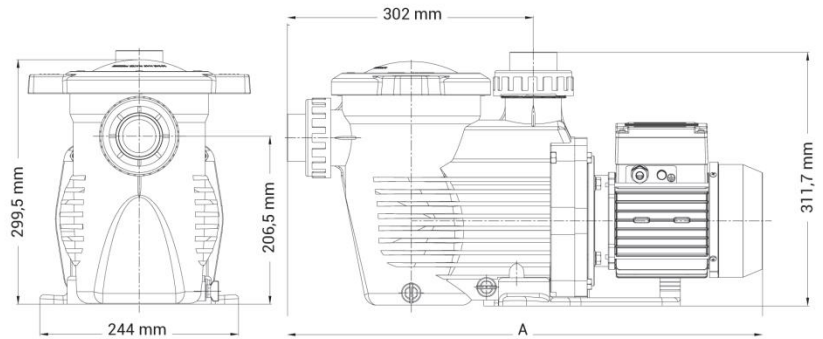

Performance Curves

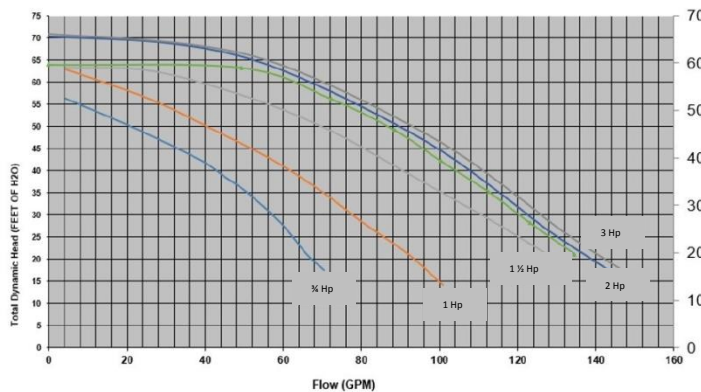

Ordering Information

Model No. 50 Hz	Model No. 60 Hz	Rated HP	Flow Rate*	Input P1	Output P2	Voltage / Phase	Connection mm/inches	Amperage	Weight	Dimension A
SPK12607XY1	SPK12607XY16	¾ Hp	11.5 m ³ /h	750 W	750 W	230V / 1ph	50mm/1 ½ "	3.8A	13.5 kg	590 mm
SPK12610XY1	SPK12610XY16	1 Hp	15.4 m ³ /h	1000 W	1000 W	230V / 1ph	50mm/1 ½ "	5.0A	14 kg	590 mm
SPK12615XY1	SPK12615XY16	1.5 Hp	21.9 m ³ /h	1600 W	1500 W	230V / 1ph	63mm/2"	7.5A	16.5 kg	620 mm
SPK12620XY1	SPK12620XY16	2.0 Hp	25.7 m ³ /h	1920 W	2000 W	230V / 1ph	63mm/2"	9.0A	22.5 kg	620 mm
SPK12630XY1	SPK12630XY16	3.0 Hp	33 m ³ /h	2600 W	3000 W	230V / 1ph	63mm/2"	12.5A	25 kg	620 mm
SPK12630XY3	SPK12630XY36	3.0 Hp	33 m ³ /h	2600 W	3000 W	400V / 3ph	63mm/2"	5.0A	27 kg	620 mm